

FIG. 1

Rest Available Copy

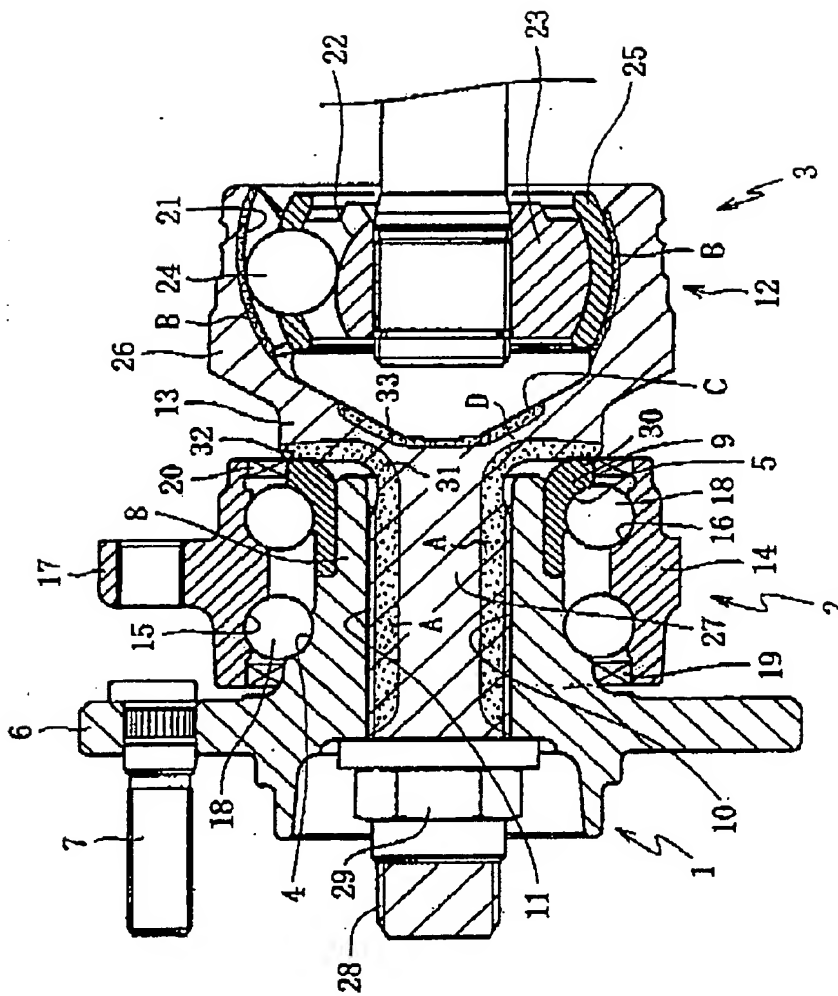


FIG. 2

Rest Available Copy

Conventional product	Static torsion strength	Surface hardness (Hv) / Hardness effective depth (mm)	
		Base portion	Unhardened portion
Conventional product	Reference	672/1.8	230
Example a	○	670/1.8	230
Example b	⊙	670/1.8	230
Example c	⊙	670/1.9	230
Example d	○	668/1.8	230
Example e	×	595/1.0	230

Cross: Crack occurred. Lower than conventional one.

Circle: Better than conventional one.

Double circle: Far better than conventional one.

FIG. 3

Best Available Copy

Heating time	Ratio of step : m/n=1.5		Ratio of step : m/n=1.8		Ratio of step : m/n=2.0	
	Hardness/ Hv/mm	Rate of crack occurrence at shoulder portion(%)	Hardness/ Hv/mm	Rate of crack occurrence at shoulder portion(%)	Hardness/ Hv/mm	Rate of crack occurrence at shoulder portion(%)
Short	665/2.5	0%	665/2.4	0%	665/2.4	0%
↓	671/2.9	0%	671/2.9	0%	671/2.8	0%
	662/3.0	0%	662/3.2	0%	662/3.0	0%
	660/3.5	0%	660/3.6	0%	660/3.1	61%
Long	660/4.2	0%	660/3.9	12%	660/3.1	88%

FIG. 4

Best Available Copy


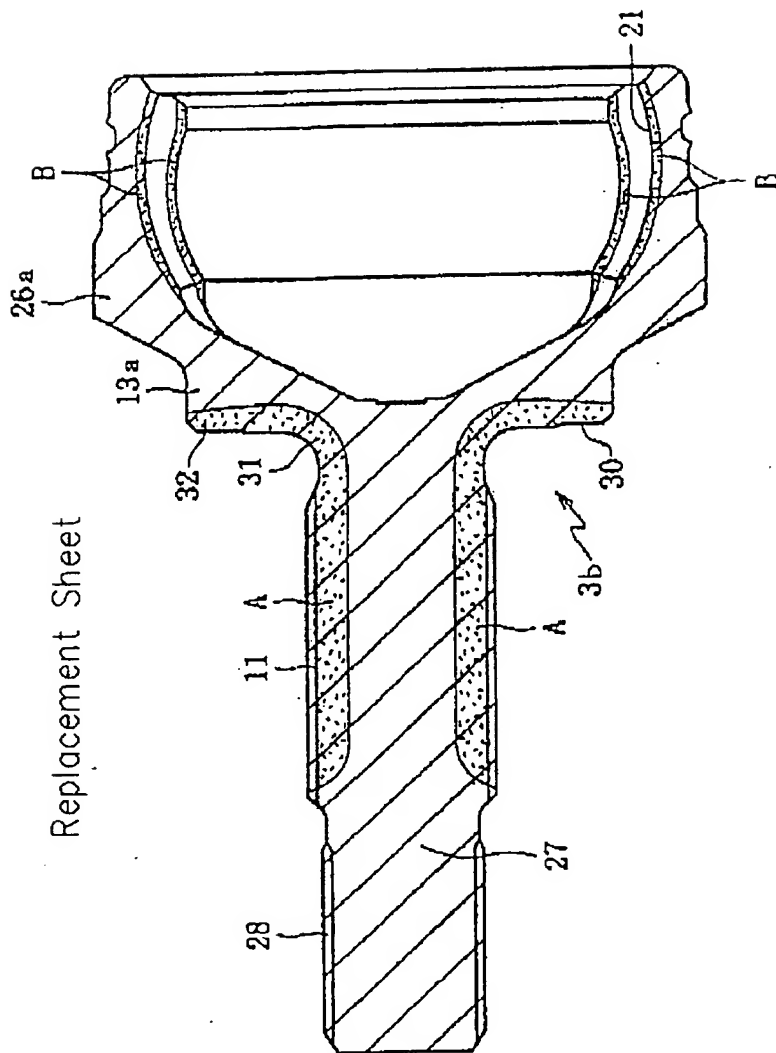


FIG. 5 (Prior Art)

Best Available Copy

Replacement Sheet

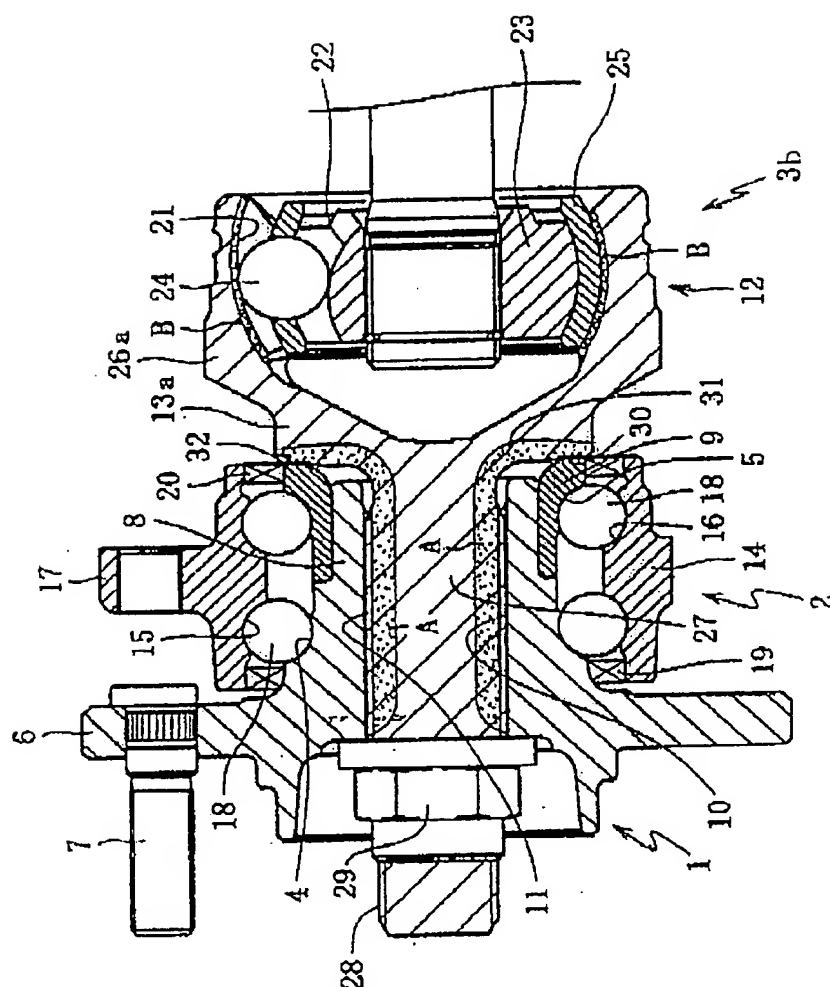

**Best Available Copy**